

ACOUSTIC SCREEN KEY

- 1.8M HIGH NOISE SCREEN
- 3.0M HIGH NOISE SCREEN
- 4.5M HIGH NOISE SCREEN
- APPROX. LOCATION REINF. CONCRETE PIER UNDER ACOUSTIC WALL POST

REFER ARBORIST REPORT PREPARED BY URBAN ARBOR FOR DETAILS OF IMPACT ON TREES OF PROPOSED ACOUSTIC NOISE SCREENS. POSITION AND EXCAVATION OF SUPPORT PIERS TO BE COORDINATED WITH ARBORIST.

REFER ARCHITECTURAL DRAWING SITE, ROOF & SITE ANALYSIS PLAN REV J DATED 5.4.21 PREPARED BY NKT ARCHITECTURE FOR LOCATION OF ACOUSTIC WALLS.

RESIDENTIAL

RESIDENTIAL

RESIDENTIAL

IF FEASIBLE, RETAIN SECTION OF EXISTING LILLYPILLY HEDGE. CONTINUE PROPOSED ACACIA SMITH HEDGE IF REPLACEMENT REQUIRED

RETAIN ALL PHOTINIAS IN GOOD HEALTH AND FORM. REMOVE POOR SPECIMENS

ID	Botanical Name	Common Name	Height	Spread	Qty	Scheduled Size
Trees						
Ac	Angophora costata	Sydney Red Gum, Smooth-barked	15 - 20m	6 - 10m	5	300 mm
MgLG	Magnolia grandiflora 'Little Gem'	Dwarf Magnolia Little Gem	3 - 6m	2 - 4m	2	45 ltr
Bmy	Backhousia myrtifolia	Grey Myrtle, Lancewood	5 - 10m	3.5 - 6m	1	45 ltr
Ti	Tristaniaopsis laurina 'Luscious'	Kanooka, Water Gum	5 - 10m	3.5 - 6m	13	45 ltr
Er	Elaeocarpus reticulatus 'Prima Donna'	Blueberry Ash	4 - 8m	3 - 4m	1	200 mm
Cg	Ceratopetalum gummiferum	NSW Christmas Bush	4 - 8m	2 - 3m	2	45 ltr
Shrubs						
Sr	Strelitzia reginae	Bird Of Paradise	0.9 - 1.5m	0.9 - 1.2m	19	200 mm
Wf	Westringia fruticosa 'Jervis Gem'	Coastal Rosemary	0.9 - 1.5m	0.9 - 1.2m	19	200 mm
De	Doryanthes excelsa	Gynea Lily, Giant Lily	1.5 - 3m	1.2 - 2.0m	16	200 mm
Ac	Arthropodium cirratum	New Zealand Rock Lily	0.6-0.9m	1m	6	200 mm
Syc	Syzygium 'Cascade'	Weeping Lillypilly	2 - 3m	1 - 2m	7	200 mm
Asg	Acmena smithii var minor	Acmena smithii 'Goodbye Neighbor	2-5 m	2-3 m	36	300 mm
Cv	Callistemon viminalis 'Better John'	Better John Bottlebrush	0.6 - 1.2m	0.6 - 0.9m	32	200 mm
Bc	Backhousia citriodora	Lemon Scented Myrtle	4-6m	3-5m	1	45 ltr
Lc	Loropetalum chinense 'Burgundy'	Burgundy Loropetalum	1 - 1.5 m	1 - 1.5 m	3	200 mm
Bsc	Banksia spinulosa	Banksia ' Cherry Candles' PBR	0.30 - 0.45m	0.6 - 0.9m	11	200 mm
Ground Covers						
Gcc	Grevillea rhytidocarpa x juniperina 'Cherry Clust	Prickly Grevillea, Cherry Cluster G	0.5 m	0.8 m	24	200 mm
Cag	Carpobrotus glaucescens	Pigface, Iceplant	0.0 - 0.3m	1.2 - 2.0m	16	140 mm
TJ	Trachelospermum jasminoides 'Tricolor'	Variegated Star Jasmine	1.5 - 3m	3 - 4m	9	200 mm
GJ	Grevillea juniperina 'Gold Cluster'	Gold Cluster Grevillea	0.2 - 0.3m	0.8 - 1.0m	6	200 mm
Grass						
DrCB	Dianella caerulea 'Cassa Blue'	Spreading Flax Lily	0.4 - 0.5m	0.4m	166	50 mm
In	Isolepis nodosa	Knobby Club-rush	0.6 - 0.75m	0.3 - 0.6m	3	100 mm
LIT	Lomandra longifolia 'Tanika'	Spiny-headed mat rush	0.45 - 0.6m	0.6 - 0.9m	131	100 mm
Pb	Phormium 'Baby Bronze'	Baby Bronze New Zealand Flax	0.75m	0.75m	10	200 mm
Pr	Pennisetum 'Rubrum'	Purple Fountain Grass	0.6 - 0.75m	0.3 - 0.6m	12	100 mm
					Total	551

3.5.21
28.4.21
9.2.21

AMEND NOTE FOR TREE SENSITIVE CAR PARK AREA.
AMEND POSITION OF ACOUSTIC WALLS. ADJUST PROPOSED PLANTING TO SUIT.
ADD REFERENCE TO ARCH DETAILS OF ACOUSTIC WALLS. REPLACE EXISTING HEDGE WITH NEW PLANTING.

AMENDMENTS
5.7.18
23.8.18
9.2.19
11.6.19
24.9.20

ISSUE FOR COUNCIL APPROVAL
ADD BIN STORAGE AND AMEND PLANTING TO SUIT.
REMOVE PATH AND FENCING. AMEND PLANTING TO SUIT.
AMEND PARKING LAYOUT. INCREASE NO. CANOPY TREES AND RETAIN TREES 33, 35, 36 & 38.
ADD PROPOSED ACOUSTIC WALLS. AMEND PROPOSED PLANTING TO SUIT.

ALL CIVIL, STRUCTURAL AND HYDRAULIC WORKS ASSOCIATED WITH THIS PROJECT SHALL BE TO THE RELEVANT ENGINEER'S DETAILS.
FIGURED DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALING. ALL DIMENSIONS AND LEVELS TO BE VERIFIED BY THE CONTRACTOR ON SITE.
THIS LANDSCAPE PLAN HAS BEEN PREPARED ON AN A1 SHEET OF PAPER TO BE READ AT 1:200 SCALE.

PROJECT

GALSTON CLUB

21-25 ARCADIA ROAD
GALSTON NSW 2159

DRAWN

PG

SCALE

1:200 @ A1

DATE

23/05/18

DWG NO

L001

Sheet 1/1

REV

F

Landscaping Plan

LANDSCAPE NOTES

SOIL PREPARATION
WHERE EARTHWORKS HAVE OCCURRED, THE CONTRACTOR IS TO ENSURE STOCKPILED TOPSOIL IS FREE OF UNWANTED MATTER SUCH AS ROCKS, CLAY LUMPS, TREE ROOTS, BUILDERS RUBBISH AND ANY MATERIAL TOXIC TO PLANTS.


NOXIOUS PLANTS
ALL DECLARED NOXIOUS PLANTS LISTED FOR THE COUNCIL AREA ARE TO BE REMOVED FROM ALL AREAS OF THE SITE.

PREPARATION OF GARDEN BEDS
CULTIVATE GARDEN BEDS TO A DEPTH OF 300MM. INCORPORATE ORGANIC SOIL CONDITIONER WITH EXISTING SOIL WHEN PLANTING. DO NOT CULTIVATE SOIL BENEATH EXISTING TREES TO BE RETAINED. FINE GRADE MULCH, SUCH AS MULCH, IS TO BE INSTALLED TO A DEPTH OF 50MM TO GARDEN BEDS, COMING NEAR OR AROUND PLANT STEMS AND FINISHING FLUSH WITH ADJACENT SURFACES. FERTILISE PLANTS WITH SLOW RELEASE FERTILISER SUITABLE TO PLANT SELECTION AND THOROUGHLY WATER IN TREATMENT.

INSTALLATION OF PLANTING MATERIAL
ALL PLANTS ARE TO BE TRUE TO NAME, SIZE AND VARIETY, IN A WELL DEVELOPED HEALTHY CONDITION, FREE FROM INSECTS AND DISEASED AND WITH WELL ESTABLISHED ROOT SYSTEMS. SUBSTITUTES IN SIZE OR VARIETY ARE NOT TO BE MADE. REFER TO PLANTING SCHEDULE FOR SPECIES, CONTAINER SIZES & QUANTITIES.

REMOVAL OF EXISTING LAWN
SPRAY THE EXISTING LAWN WITH A WEAK SOLUTION OF A NON SELECTIVE HERBICIDE SUCH AS GLYPHOSATE. REPEAT AFTER 2 WEEKS IF REQUIRED. INSTALL LAYER OF GOOD QUALITY COMPOSTED WOOD CHIP/LEAF MULCH TO A DEPTH OF 75MM.

IRRIGATION
INSTALL AN IRRIGATION SYSTEM APPROVED BY COUNCIL AND/OR SYDNEY WATER TO ALL NEW GARDEN BEDS AND PLANTERS CONNECTED WITH BUILDING.

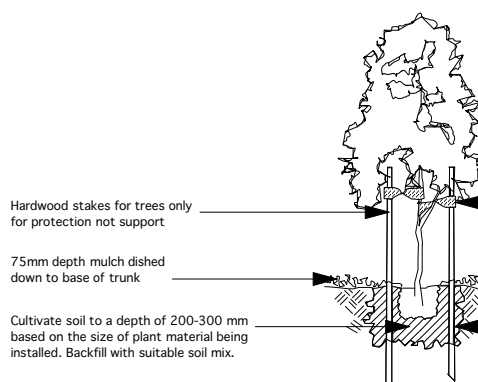

TYPICAL PLANTING DETAIL

NOT TO SCALE